
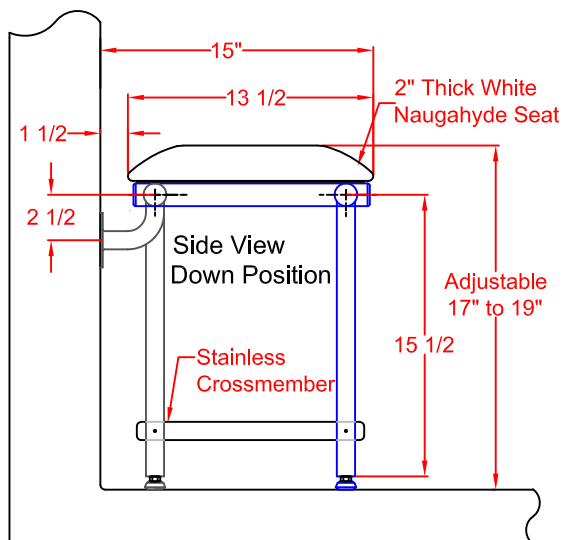


APFSSB2-240150-NW
24" x 15" BENCH SEAT
with Swing Down Leg

BENCH SEAT
MODEL # APFSSB2-240150-NW
with Swing Down Leg
(with White Naugahyde Seat)

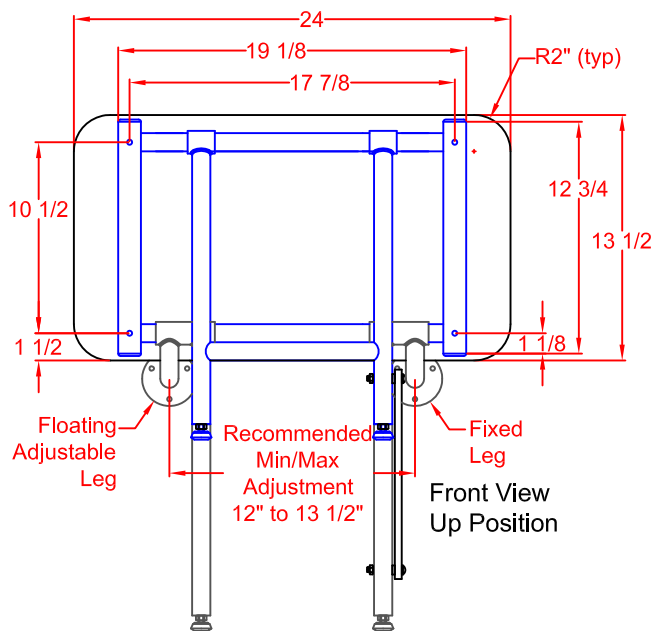

OPERATION:

Seat is automatically held in a raised position by a stainless cross member attached to the front and rear support legs. When the seat is lowered into its down position the Swing Down Leg automatically aligns the front and rear support legs with the help of the stainless cross member.

ARCHITECTURAL SPECIFICATIONS:

Model APFSSB2-240150-NW Folding Bench
Frame: Type 304 (18-8) S.S. tube,
1-1/4" (32mm) x 18ga. (1.2mm) sq. main frame with
1" (25mm) x 18ga. (1.2mm) rd. cross members. Leg:
"H" - shaped yoke of type 304 (18-8) S.S. tubing, 1"
(25mm) x 18ga. (1.2mm) rd. tubing, Heliarc welded
to 1-1/4" (32mm) rd. x 12ga. (2.7mm) frame hinge
The Swing Down Legs automatically level when the
seat is lowered to a horizontal sitting position. The
seat automatically locks itself when swung into its
"up" position with the use of the stainless cross
member.

MATERIALS:

FRAME: Type 304 (18-8) S.S. tubing, 1-1/4" (32mm)
x 18ga. (1.2mm) sq. main frame with 1" (25mm) x
18ga. (1.2mm) rd. cross-members.

WALL FLANGES (2): Type 304 (18-8) S.S., 10ga. (3.4
mm) x 3" (76mm) dia. heliarc welded to 1" (25mm)
rd. x 18ga. (1.2mm) 90 degree leg supports, and
to 1-1/4" (32mm) rd. x 12ga. (2.7mm) frame hinge
couplings. Three mounting holes in each flange.

SWING DOWN LEG: "H" shaped yoke of type 304
(18-8) S.S. 1" Dia. (25mm) x 18ga. (1.2mm) rd. tubing,
heliarc welded to 1-1/4" (32mm) rd. x 12ga. (2.7mm)
frame hinge couplings.

SEAT CHOICES:(Designate when ordering)

NW or NA - White (NW) or Almond (NA) Naugahyde
covering 2" (51mm) foam mounted on 1/2"
(13mm) marine plywood.

PW or PT - White (PW) or Teak (PT) Finish Phenolic 1/2"
(13mm) x 3" (76mm) slats bolted to frame with
S.S. screws.

HW - White High Density Polyethelene (HDPE) 1/2"
(13mm) thick, bolted to frame with S.S. screws.

INSTALLATION:

All Shower Seats must only be installed using suitable
fasteners and sufficient in-wall backing materials. ADA
mounting height for lowered seat is 17" (432mm) to 19"
(482mm).